

Submittal Data: SC-12CC-HP230 12,000 BTU/H Ceiling Cassette

Job Name _____ Location _____ Date _____

Purchaser _____ Engineer _____

 Submitted To _____ For Reference Approval Construction

Unit Designation _____ Schedule No. _____

GENERAL FEATURES

- Quiet Operation -Multi-Speed Fan
- 4-way Discharge Air
- Internal Condensate Drain Pump
- Swing Louver
- Both Wireless & Wired Remote Controllers
- Power Failure Recovery
- Sentry Condensate Overflow Protection
- Decorative Grille (INCLUDED) SC-CC-GRILLE-12K


System Ratings

Cooling*	
Rated Capacity	12,000 BTU/H
Heating*	
Rated Capacity	13,000 BTU/H
Sound Pressure (Hi/Lo)**	
Cooling	46/32 dbA
Heating	46/32 dbA
Air Flow (min/max)	
Indoor Fan	265/353 CFM

Units Specification & Data

Wired Controller	XK-19
Air Filter	Netted polypropylene
Condensate Drain Lift (Height)	12-in 305-mm
Drain Size (OD)	1.2-in 31-mm

Electrical Ratings

Fan Motor	
Output Power	11 W
FLA	0.2 A
Power Supply	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
MCA	1.0 A
Interconnecting Cable Wire Size	14-4 AWG

Refrigerant Piping Data


Refrigerant Type	R410A
Gas Pipe Size (OD)	3/8-in
Liquid Pipe Size (OD)	1/4-in
Connection Method	Flared
* Test conditions are based on AHRI 210/240.	
**Sound Power ratings are per AHRI 270 and AHRI 350	



12,000 BTUH MODEL

Model # SC-12CC-HP230 12,000 BTUH 230V

Units: inch (mm)

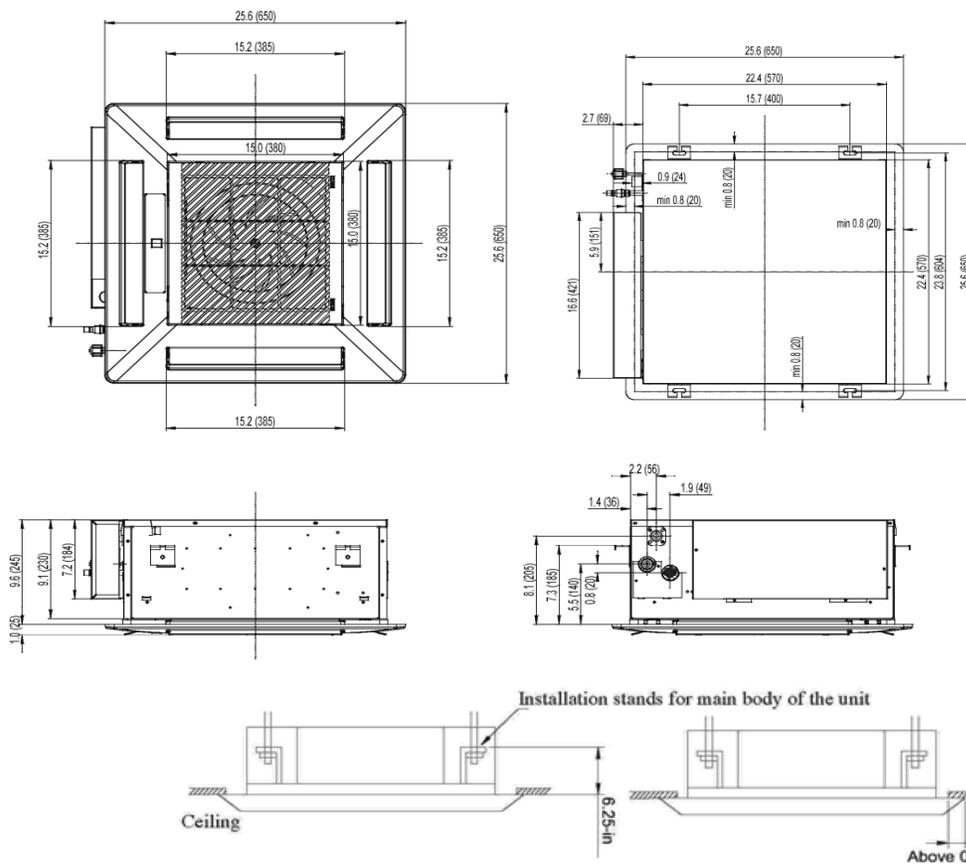


SC-CC-GRILLE-12K

Decorative Grille (Included)

Weight (Net/Gross) 40/51 lbs

MINIMUM CLEARANCES

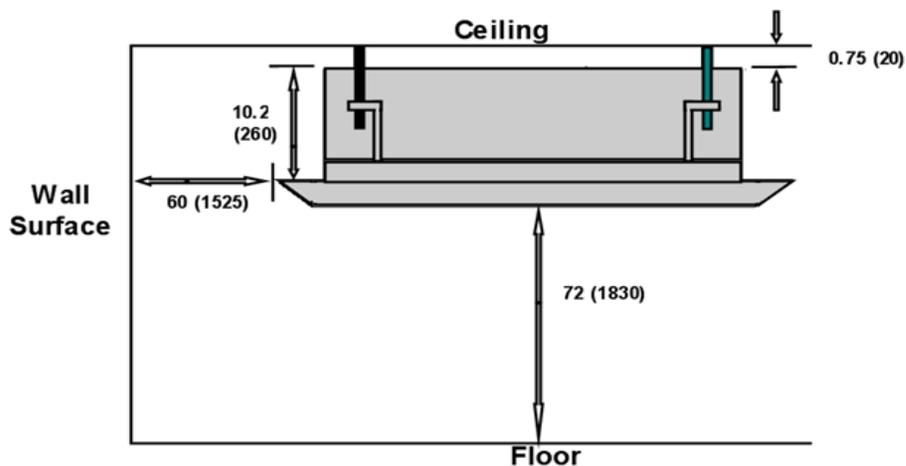

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.