

ULTRA COOL

COOLING PERFORMANCE

Outdoor Ambient Temperature (DB)	Return Air Temperature			
	80°F (DB)			
	TC (Btu/h)	SHR	EER	Power Input (W)
0°F	7000	72.50%	10.99	637
5°F	7280	73.00%	11.20	650
10°F	7490	73.26%	11.19	670
15°F	7700	73.50%	11.18	689
20°F	8050	73.76%	11.26	715
25°F	8400	74.00%	11.34	741
30°F	8680	74.26%	11.41	761
35°F	8960	74.50%	11.49	780
40°F	9800	75.00%	11.60	845
45°F	10220	75.26%	11.15	917
50°F	10640	75.50%	10.77	988
55°F	11340	76.00%	10.90	1040
60°F	12110	76.27%	10.96	1105
65°F	12880	76.50%	11.01	1170
70°F	13510	76.76%	11.23	1203
75°F	14140	77.00%	11.45	1235
80°F	14700	77.26%	11.72	1255
85°F	15260	77.50%	11.98	1274
90°F	14630	77.74%	11.37	1287
95°F	14000	78.00%	10.77	1300
100°F	13300	78.24%	9.84	1352
105°F	12600	78.50%	8.97	1404
110°F	12180	78.74%	8.40	1450
115°F	11760	79.00%	7.87	1495
120°F	10360	79.50%	6.87	1508
125°F	9380	79.72%	6.19	1515
129°F	8400	80.00%	5.52	1521

MAX OUTPUT

ULTRA HEAT

HEATING PERFORMANCE


Outdoor Ambient Temperature (DB)	Return Air Temperature		
	70°F (DB)		
	TC (Btu/h)	COP	Power Input (W)
-22°F	6400	1.23	1523
-20°F	6640	1.26	1544
-15°F	6880	1.29	1566
-10°F	7280	1.35	1588
-5°F	7680	1.40	1610
0°F	10400	1.86	1639
5°F	12000	2.11	1668
10°F	12800	2.33	1610
15°F	13520	2.48	1602
17°F	14240	2.62	1595
20°F	14400	2.77	1523
25°F	14560	2.89	1479
30°F	14880	2.98	1465
35°F	15040	3.09	1428
40°F	15200	3.20	1392
45°F	15680	3.23	1421
47°F	16000	3.23	1450
50°F	16640	3.31	1472
55°F	17280	3.39	1494
60°F	18400	3.51	1537
65°F	17600	3.26	1581
70°F	16960	3.12	1595
75°F	15840	2.88	1610

MAX OUTPUT


LEGEND: W - Watts
 DB - Dry Bulb
 TC - Total Capacity
 SHR - Sensible Heat Ratio
 COP - Coefficient of Performance

MINIMUM SPACING REQUIREMENTS

Units: inch (mm)

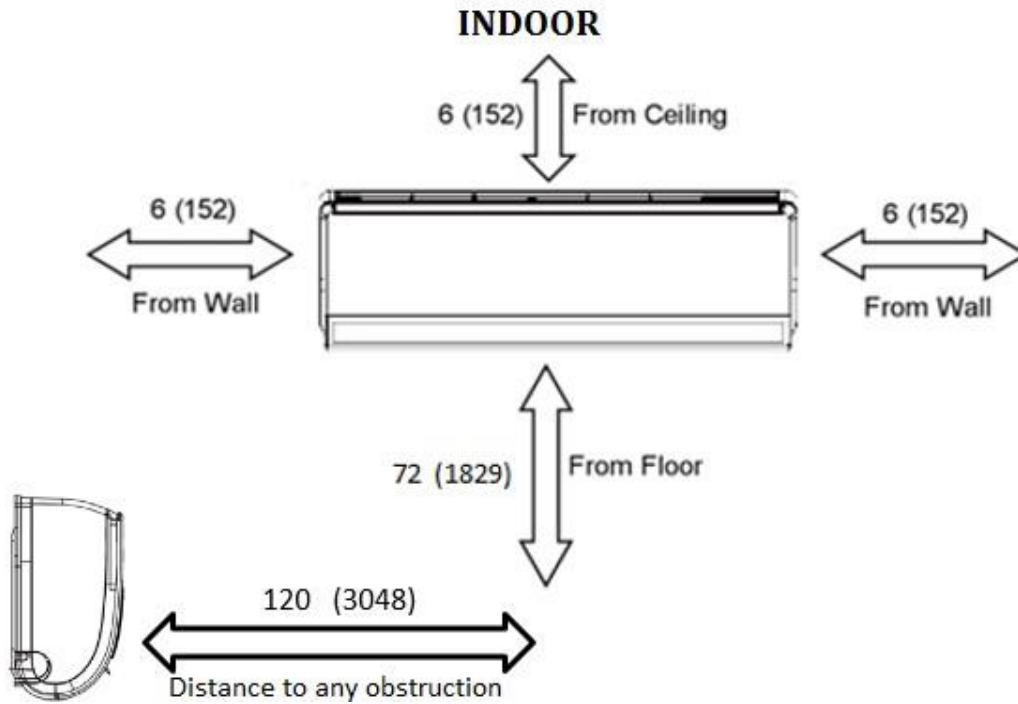

MINIMUM OUTDOOR CLEARANCES

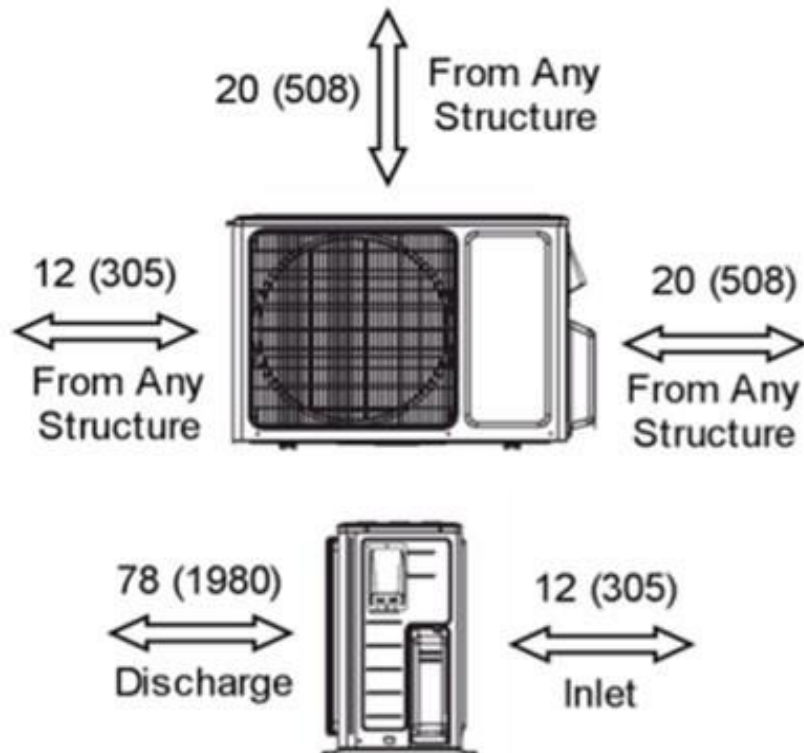



DIMENSIONAL SPECIFICATIONS

SC-12WPL-HP230

INDOOR UNIT DIMENSIONS

Units: inch

Model No: SC-12WPL-HP230

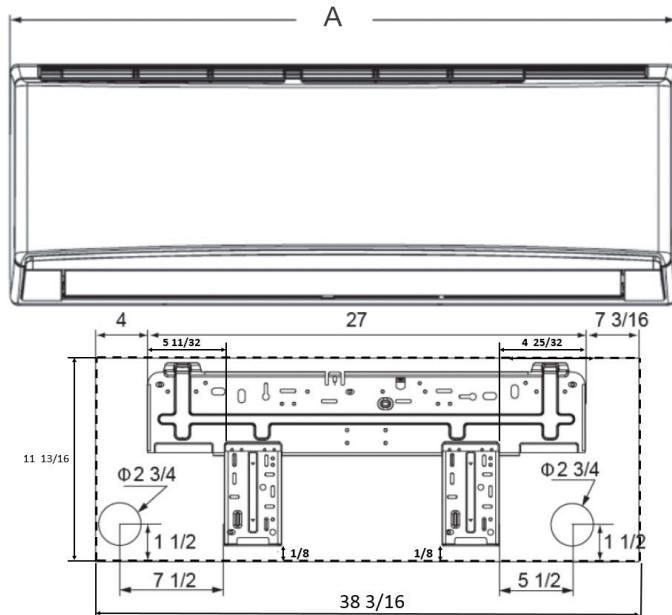

Dimensions	
A	39 1/2
B	12
C	8 7/8



Weight (Net/Shipping) 29 / 36 LBS

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD


OUTDOOR UNIT DIMENSIONS

Units: inch

Model No: SC-12ZPL-HP230

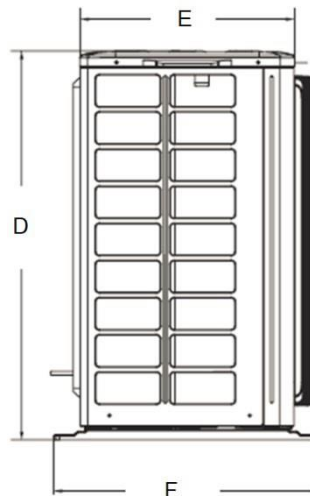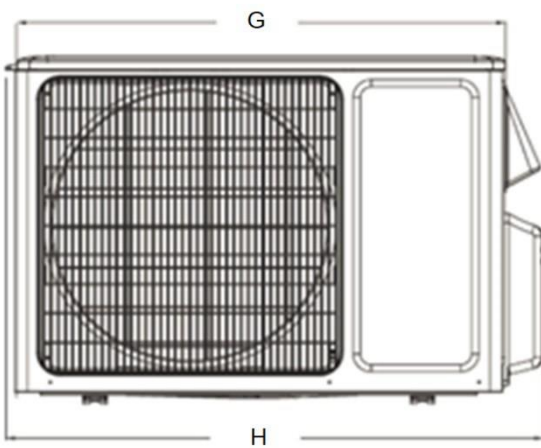

Dimensions	
D	23 1/2
E	12
F	14 7/8
G	33 1/4
H	34 5/8
I	19 3/8
J	13 1/2

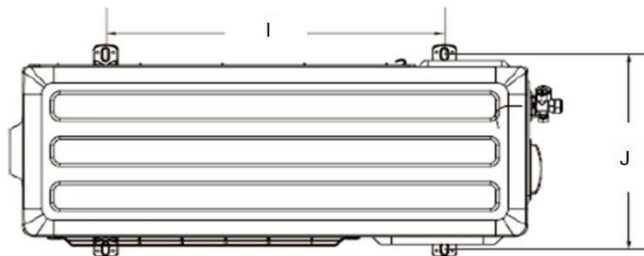

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared

Weight (Net/Shipping) 98 /104 LBS

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.